


FREE MAINTENANCE BATTERY

Flooded battery										
Code	Voltage	Capacity	Cold Cranking	Res.Cap.	Tester	Terminal	Lid	Bottom holds	Layout	Per pallet
B422C	V	Ah 20h	A (EN)	minutes		small	28 NU		Pos right	36x4
	12	24	240	32 a 25A		4	flat with handle	B0	Right	

TOP ENERGY EVO

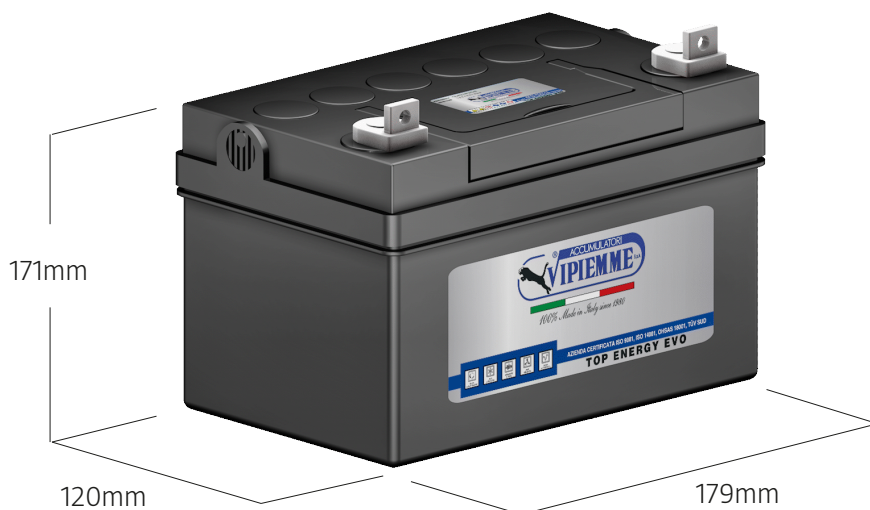

BOX AND LID COLOUR
Black


Technical characteristics




BOX AND LID
PP



FLAMES ARRESTOR
Placed in the lid




SULFURIC ACID
Density
1,28 +/- 0,01g/ml
Approximate volume 1,4l



TEMPERATURE
All value are referred to 25° C



BATTERY WEIGHT
7,8Kg



PLATES
Low Content Antimony Lead Alloys Pb/Sb
according to DIN norm